

AQUA FLO

Aqua Flo Ultraviolet Disinfection Systems: UVB Series™



Aqua Flo Product's patented UVB Series is designed to provide disinfected water at a flow rate of 2 gallons per minute. In addition to disinfection, water is filtered through our 0.5 micron Extended Pass Carbon Block (EPCB) filter. Our double and triple models provide you with additional filtration with sediment and activated carbon filters.



All Aqua Flo Products Feature:

- ◆ Water disinfection
- ◆ Easy to change lamp and filters
- ◆ Lamp and ballast matched for quality assurance
- ◆ Simple installation

These systems are for the supplemental treatment of disinfected drinking water which has been treated or other drinking water which has been tested and deemed acceptable for human consumption by the state or local health agency having jurisdiction. These systems are designed to reduce normally occurring non-pathogenic nuisance organisms and is not intended for the treatment of contaminated water. The contaminants and other substances reduced by this water treatment device are not necessarily in your water. In addition, the presence of certain contaminants in your drinking water does not necessarily pose a health risk.

Aqua Flo is an advanced Ultraviolet Water Treatment System. It had been designed with you, the consumer, in mind. Aqua Flo Products are lightweight, easy to use and simple to maintain. Aqua Flo Products will provide you with clean, disinfected drinking water for years to come.

This compact All-in-One system installs with ease and can be used anywhere that clean, clear, good tasting disinfected water is needed. It is ideal for point-of-use applications like under the kitchen sink, office water coolers, water vending machines, boats, recreational vehicles, etc.

Features:

- ◆ Electronic lamp indicator (LED)
- ◆ Standard voltage 115V




Options:

- ◆ 220V/50Hz (2-Prong Euro plug)
- ◆ 12V DC
- ◆ Lamp Out Circuit (LOC) - (normally open) Safety monitor for alarm
- ◆ Lamp Out Circuit (LOC) - (normally closed) Safety monitor for solenoid shut off
- ◆ Three year warranty except on electrical components which are covered for a period of one year.

Conditions For Use

Source Water Supply Profile		Chemical Parameters	Max mg/L
Feed Water Pressure†	20 – 75psig (138 – 517kPa)	Hardness (CaCO3)	< 120 (7 GPG)
Feed Water Temperature	38° – 105°F (3.3° – 40.5°C)	Iron (Fe)	< 0.3
pH Range	6.5 – 9.5	Manganese (Mn)	< 0.05
Total Dissolved Solids	< 1500 mg/L	† Water Pressure must not exceed 75 psig (517 kPa) or a pressure regulator must be installed.	
Total Suspended Solids	< 10 mg/L		
Turbidity	< 5 NTU		

U.S. Patent #4,971,687

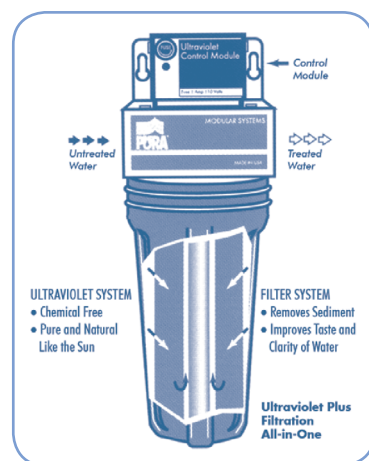

Model Description	# of Sumps	Sump Type	Sump 1	Sump 2	Sump 3	Lamp #	Power Used	Flow Rates ¹ GPM (L/min)	Dimensions HxWxD In. (cm)	Shipping Weight LBS. (kg)	Inlet/Outlet Size
UVB1-EPCB	1	#10	EPCB Carbon/UV	None	None	# 11	14 Watts	2 (7.6)	15 x 5.5 x 5.5 (38.1 x 14 x 14)	10.0 (4.5)	3/8" NPT
UVB1-EPCB Normally Closed	1	#10	EPCB Carbon/UV	None	None	# 11	14 Watts	2 (7.6)	15 x 5.5 x 5.5 (38.1 x 14 x 14)	10.0 (4.5)	3/8" NPT
UVB1-EPCB Normally Open	1	#10	EPCB Carbon/UV	None	None	# 11	14 Watts	2 (7.6)	15 x 5.5 x 5.5 (38.1 x 14 x 14)	10.0 (4.5)	3/8" NPT
UVB2-EPCB/SD	2	#10	5 Micron Sed Filter	EPCB Carbon/UV	None	# 11	14 Watts	2 (7.6)	15 x 11 x 5.5 (38.1 x 27.9 x 14)	15.0 (6.8)	3/8" NPT
UVB3-EPCB/GC/SD	3	#10	5 Micron Sed Filter	Granular Carbon Filter	EPCB Carbon/UV	# 11	14 Watts	2 (7.6)	15 x 11 x 5.5 (38.1 x 27.9 x 14)	24.0 (10.9)	3/8" NPT

AQUA FLO

Your Local Water Specialist

A Division of



80157011 07/16

www.canaturewg.com